

	Art. 0960S	Art. 0960	Art. 090S	Art. 090
ENGINE	3,4Hp / 2,5Kw		0,9Hp / 0,65Kw	
SPEED SELECTION	60 min ⁻¹ (1,0Kw) 120 min ⁻¹ (2,5Kw)		60 min ⁻¹ (0,5Kw) 120 min ⁻¹ (0,9Kw)	
POLYPROPYLENE BRUSH	Ø 500 included		Ø 420 included	
TANK CAPACITY	8 lt	-	8 lt	-
DIMENSION MACHINE IN STOCK	690 x 580 x h. 820 mm		570 x 430 x h. 440 mm	
DIMENSION MACHINE	510 x 620 x h. 1400 mm		Ø420 x h. 1400 mm	
NET WEIGHT	37 Kg	36 Kg	24 Kg	21 Kg



Art. 0960S



Art. 0960



Art. 090S



Art. 090

BATTIPAVTM
MACCHINE PER EDILIZIA | MACHINES FOR BUILDING

Z. i. 2 - Via Cavatorta, 6/1 | 48033 Cotignola (Ra) | ITALY
Tel. +39 0545 40004 | Fax +39 0545 41724
www.battipav.com | sales@battipav.com

AUTHORIZED DEALER:



January 2017



*Designed
and made
in Italy*



APPLICATION
Machine for surfacing and cleaning floors made from
ceramic or cotto tiles, marble, natural stone.



Art. 0960S

STRUCTURE

Structure in aluminium cast, hosting engine, handle and wheels, for an excellent rigidity of the whole set.


BALLAST 10Kg (optional)

For special applications the machine can be ballasted with weights from 10 to 50 Kg.



POWERFUL MOTOR

in central position respect to the brush, for a better handling and balancing during use.

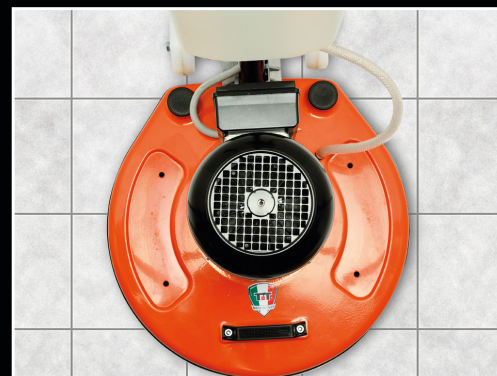

HANDLE ADJUSTMENT

The adjustment of the handle inclination to the right working position is made by a multi-plate clutch, which is more reliable and secure.



HANDLE

New handle with double safety system and with selector for 2 speeds.



HEIGHT HANDLE ADJUSTMENT

The Height Handle Adjustment to get a perfect working position is made by means a wing nut screw



TILT ADJUSTMENT OF THE HANDLE BY FRICTION

The adjustment of the handle inclination to the right working position is made automatically by friction



Art. 090S

